



RIDUTTORE DI PRESSIONE AP 100


Pressure regulator

Détendeur de pression

entrata girello - **inlet** - **entré** 20 x 1,5 14 sp/ " sin.

uscita - **outlet** - **sortie** 1" oppure 1/2" gas

Cod. **2.49.10**

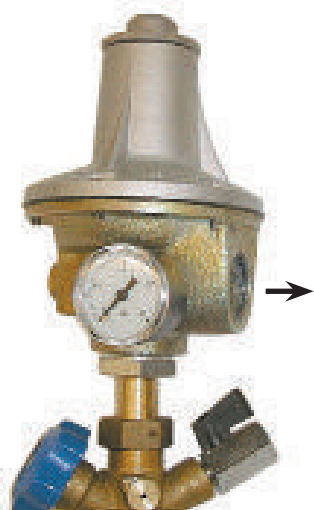

RIDUTTORE DI PRESSIONE AP 101

per serbatoi interrati

Pressure regulators for underground tanks

Détendeur pour réservoirs enterrés

entrata girello - **inlet** - **entré** 3/4"

uscita - **outlet** - **sortie** 1"

Cod. **2.49.11**

P₁ max 18 bar

P₂ = 0,5 ÷ 1,5 bar regolabile

Portata max: 100 Kg/h

Max flow rate

Max debit

Con valvola di sicurezza 3 bar

With safety valve

Avec soupape de sécurité

Temperatura -30 +60 °C

Temperature

Température

MATERIALI - MATERIALS - MATÉRIELS

Coperchio: alluminio pressofuso

Die-cast aluminium cover

Couvercle: aluminium moulé sous pression

Corpo : ghisa sferoidale

Spheroidal cast iron body

Corps: fonte sferoidale

Membrana : gomma telata

Linenized gum membrane

Membrane: caoutchou toilé

Otturatore: ottone

Obturator: Brass

Obturateur: Laiton

Pastiglia: gomma VITON

Rubber pad

Garniture de caoutchou

