

GENERAL DESCRIPTION / APPLICATIONS / DIMENSIONS



Five way manual-reset solenoid valve.

Suitable for gaseous media.

Model for liquid media available upon request.


Stainless steel internal parts. Stainless steel spring.

Stainless steel internal parts.

Stainless steel springs.

360° degrees orientable solenoid.

Mountable in any position.

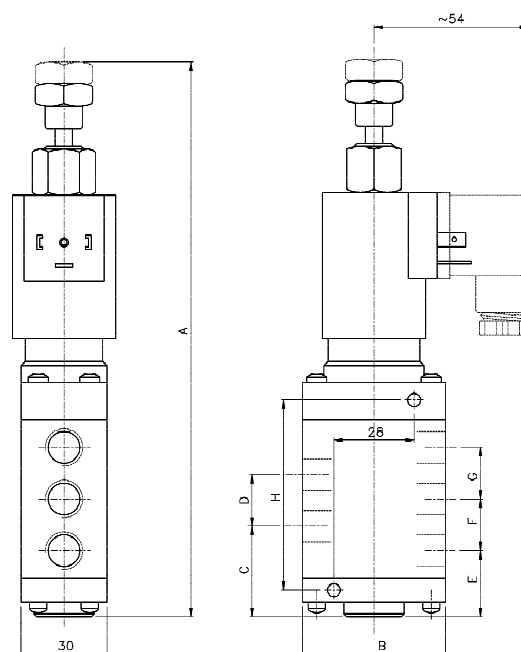

ELECTRICAL INFORMATION

Glass-reinforced nylon moulded coil with electrical connection suitable for DIN-43650A plug (2 poles+ground) or "faston" wire terminal.

| | |
|------------------------------------|---|
| Nadi type: | B6 |
| Insulation class: | F (155°C) - H (180°C) upon request. |
| Winding wire class: | H (180°C) |
| Protection degree: | IP-65 (EN60529 standards) when properly plug connected with DIN-43650A plug. |
| Duty: | Continuous - 100% ED |
| Power consumption ₍₁₎ : | 11W * |
| Voltage tolerance: | ± 10% |
| Insulation: | >1000 MOhm |
| Dielectrical Strength: | >2000 V/1' |
| Standard voltages | 12, 24, 48, 110, 115, 125, 220, 240 Volt |
| DC= oAC~(50/60Hz): | other voltages available upon request. |

* Alternate current operation (Vac~) is performed using a direct current coil and a DIN-43650A plug with internal rectifier (Nadi plug code: 398).

OPERATION



“Rest”



“Work:

Five way manual reset solenoid valves are normally used to realize safety pilot devices for single-acting actuators.

Manual reset solenoid valves can only change from “Reset” to “Work” condition operating the latching device manually.

“E” type operation

Spool of the valve is manually latched to the “Work” condition with the coil de-energized.

Energizing the coil the spool will be unlatched and the valve will come back to the "Rest" position.

“D” type operation

Spool of the valve is manually latched to the “Work” condition with the coil energized.

De-energizing the coil the spool will be unlatched and the valve will come back to the "Rest" position.

SPECIFICATIONS AND AVAILABLE OPTIONS

| MODEL | | | | | ORIFICE DIAMETER mm | PRESSURE IN BAR | | | OPER. | Flow factor k v (liters/min.') | WEIGHT Kg. | DIMENSION (millimeters) | | | | | | | |
|-------|---|-----|----------------|---|---------------------------|-----------------|--------------|------|-------|--------------------------------------|---------------|-------------------------|----|------|----|----|----|----|----|
| | | | | | | NOMINAL MAX. | DIFFERENTIAL | | | | | A | B | C | D | E | F | G | H |
| | | | | | | | MIN. | MAX. | | | | | | | | | | | |
| G 0 3 | a | 7 0 | C _D | P | 7 | 14 | 0 | 14 | D | 12 | 0.9 | 201 | 50 | 31,5 | 18 | 23 | 18 | 18 | 66 |
| G 5 3 | | 7 0 | C _D | P | 7 | 14 | 0 | 14 | E | 12 | 0.9 | 201 | 50 | 31,5 | 18 | 23 | 18 | 18 | 66 |
| G 1 3 | | 1 1 | E _T | P | 11 | 14 | 0 | 14 | D | 30 | 1.1 | 219 | 60 | 41 | 30 | 26 | 30 | 30 | 96 |
| G 6 3 | | 1 1 | E _T | P | 11 | 14 | 0 | 14 | E | 30 | 1.2 | 219 | 60 | 41 | 30 | 26 | 30 | 30 | 96 |
| G 1 3 | | 1 1 | F _G | P | 11 | 14 | 0 | 14 | D | 30 | 1.5 | 219 | 60 | 41 | 30 | 26 | 30 | 30 | 96 |
| G 6 3 | | 1 1 | F _G | P | 11 | 14 | 0 | 14 | E | 30 | 1.8 | 219 | 60 | 41 | 30 | 26 | 30 | 30 | 96 |

suffix (options available upon request): ⁽¹⁾ “/LC” (low consumption)

| a Body material | b Port size | c Seals (fluid temp. min./max.) | d Protection class | |
|---|---|--|---|--|
| T Brass. N Nickel-plated brass. I Stainless steel. | C 1/4" GAS D 1/4" NPT E 3/8" GAS T 3/8" NPT F 1/2" GAS G 1/2" NPT | 0 Buna N 1 FPM 7 HNBR | P IP 65 <i>When properly plug connected with DIN-43650A plug.</i> | |

Rev. W1- ENG 2009

Le caratteristiche possono subire variazioni senza preavviso / Characteristics may change without notice.