

VAPORIZZATORI GPL ELETTRICI Tipo feed-back

ATEX

LPG ELECTRIC VAPORIZERS EExd

VAPORISATEURS GPL ELECTRIQUE EExd

COPRIM - ITALY



Box EExd
con termostati
EExd box containing
thermostat
boîte EExd contenant
thermostats


VAP.	Cod.
25 Kg/h	1.02.25
50 kg/h	1.02.26
100 Kg/h	1.02.27
150 Kg/h	1.02.28
200 Kg/h	1.02.29
300 Kg/h	1.02.30
500 Kg/h	1.02.31



con quadro di comando
EExd
with EExd command board
avec panneau de contrôle
EExd


VAP.	Cod.
25 Kg/h	1.02.35
50 kg/h	1.02.36
100 Kg/h	1.02.37
150 Kg/h	1.02.38
200 Kg/h	1.02.39
300 Kg/h	1.02.40
500 Kg/h	1.02.41

quadro IP55
non compreso
command board
excluded
tableau de bord
pas compris

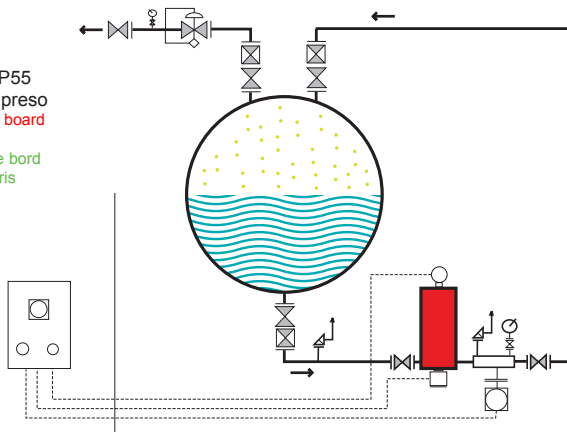

ISPEL 0100
modulo H - H1
Garanzia di Qualità Totale

PED
Pressure
Equipment
Directive

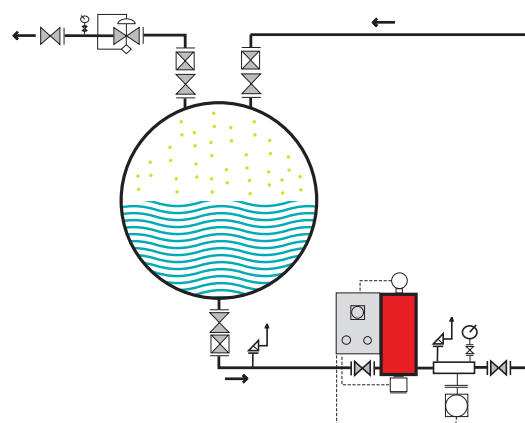

temperatura progetto TS - 40 +120 °C

design temperature - température du projet

pressione progetto PS 40 bar

design pressure - pression du projet

SPECIFICA

- Manometro Ø60 25 bar con contatti
- Valvola di sicurezza 1/2" 18 bar
- Termometro -20 + 120 °C
- Vaschetta espansione acqua
- Resistenze elettr. EExd 8 kw
- Pressostato
- contenuto acqua + glicole

SPECIFICATION

- Manometer Ø60 25 bar with contact
- safety valve 1/2" 18 bar
- Thermometer -20 + 120 °C
- Water expansion pot
- Electrical resistences 8 kw
- Pressure switch
- water + glycol contained

DETAIL

- Manomètre Ø60 25 bar
- Valve de sécurité 1/2" 18 bar
- Thermomètre -20 + 120 °C
- Vase d'expansion eau
- Résistances électriques 8 kw
- Pressostat
- contenu eau + glycol