


△ THE ARROW, MARKED ON SENSOR EXTERIOR INDICATES NORMAL FLOW DIRECTION.THE TRANSMITTER CAN BE CONFIGURED FOR NORMAL (FORWARD), REVERSED OR BI-DIRECTIONAL FLOW.



F O R I N F O R M A T I O N O N L Y

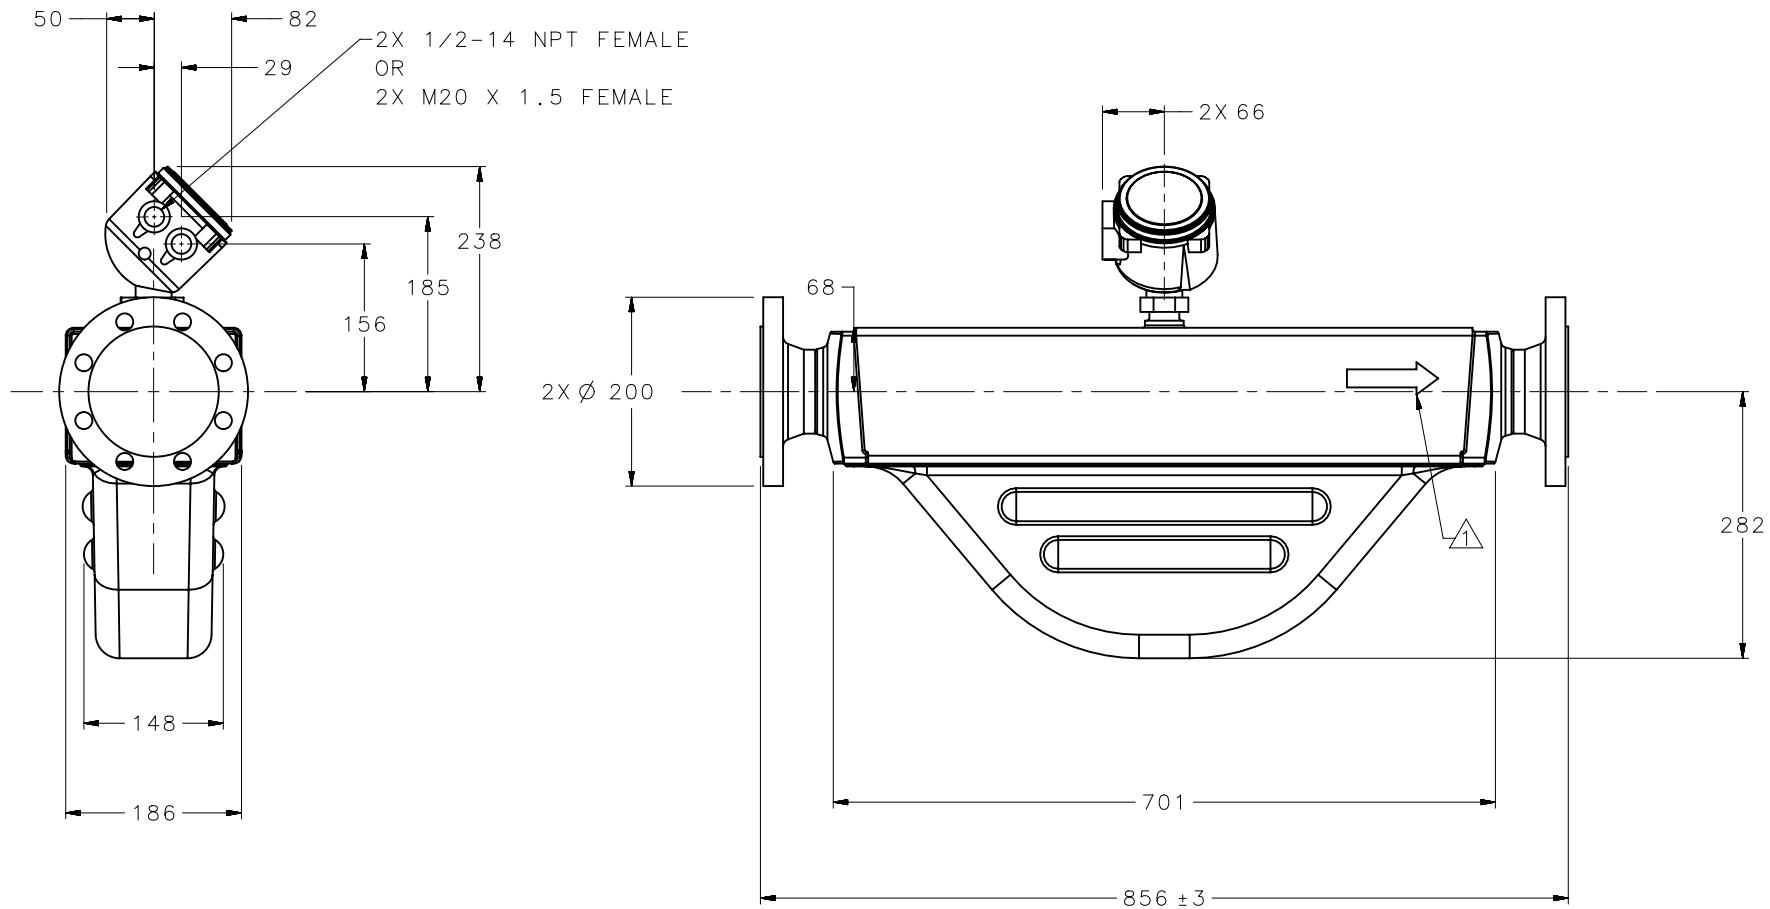

MODEL:  
F300S371E2FZEZZZ

MICRO MOTION DIMENSIONAL DRAWING

DRAWN BY: PRG  
REV:  
DATE: APRIL 12, 2019  
DIMENSIONS ARE IN METRIC  
DO NOT SCALE DRAWING

MATERIALS (WHERE APPLICABLE):  
FLANGE: EN 1092-1 DN80 PN40 TYPE B1 F316/F316L  
SENSOR: 316L / CF-3M STAINLESS STEEL; SENSOR CASE: 304L STAINLESS STEEL  
ENCLOSURE: ENHANCED CORE, POLYURETHANE PAINTED ALUMINUM  
ALLOWS FULL 360° ROTATION IN 45° INCREMENTS TO ORIENT WIRING CONDUIT OPENING

WEIGHT: 47 KG

ADDITIONAL NOTES: