
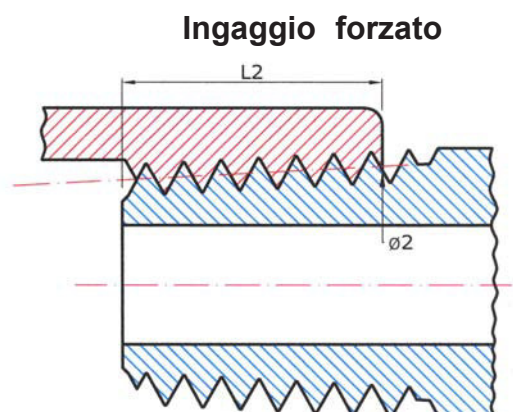


FILETTATURA NPT (National Standard Taper Pipe Thread)

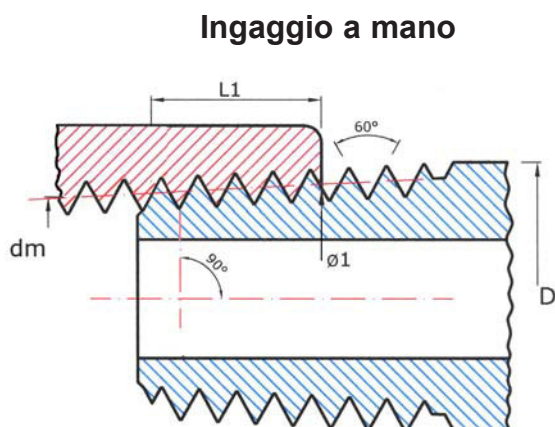


conicità: $1/16 = 6,25\%$ $\alpha = 3^\circ 34' 48''$

filetti a 90° rispetto all'asse del pezzo.

Diametro nominale (del tubo)	D diametro nominale	N° spire per pollice	Ingaggio a mano		Ingaggio forzato	
			L1 mm	Ø 1	L2 mm	Ø 2
1/8"	10,29	27	4,1	9,49	6,70	9,65
1/4"	13,72	18	5,78	12,48	10,20	12,76
3/8"	17,14	18	6,09	15,93	10,35	16,19
1/2"	21,34	14	8,13	19,77	13,56	20,11
3/4"	26,67	14	8,61	25,12	13,86	25,44
1"	33,40	11,5	10,16	31,46	17,34	31,91
1 1/4"	42,16	11,5	10,67	40,22	17,95	40,67
1 1/2"	48,26	11,5	10,67	46,29	18,38	46,77
2"	60,32	11,5	11,07	58,32	19,22	58,83
2 1/2"	73,03	8	17,32	70,16	28,90	70,98

1 3/4 ACME

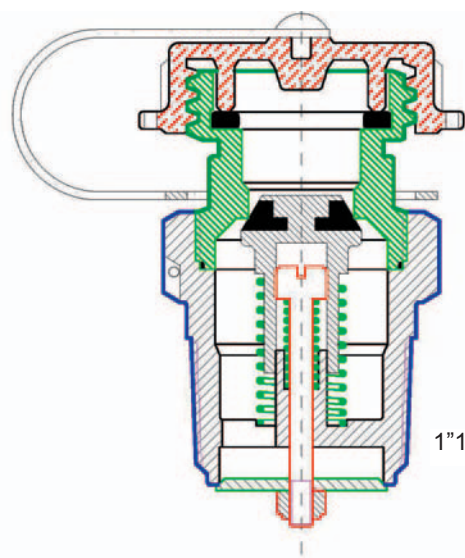

1 1/4 NPT

**VALVOLA
RIEMPIMENTO IMV 20**
Filling valve - Vanne de remplissage

Cod. **1.51.10**