


VALVOLA DIFFERENZIALE PER POMPE GPL

BY-PASS valve for LPG pumps

COPRIM - ITALY

Soupape différentielle pour pompes GPL

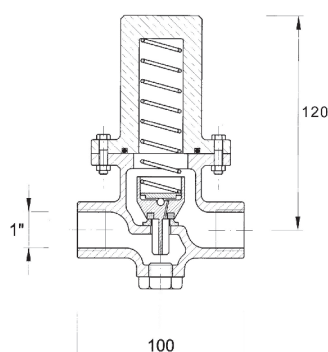

TARATURA FISSA

FIXED SETTING


REGLAGE FIXE

Cod. **1.92.89**

pressione di intervento **10 bar**

operating pressure

pression d'intervention

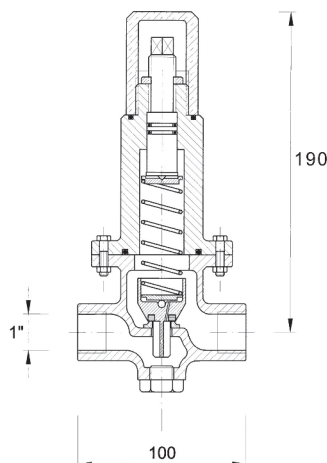

TARATURA REGOLABILE

ADJUSTABLE SETTING

REGLAGE REGLABLE

Cod. **1.92.90**

pressione di intervento **7 ÷ 17 bar**

operating pressure

pression d'intervention

Materiali - **Materials** - **Matériels**

- Corpo in ghisa sferoidale calmierata

Spheroidal cast iron body

Corp en fonte sphéroidale

- Coperchio in alluminio

Aluminium cover

Couvercle en aluminium

- Pressione di collaudo

Testing pressure

40 bar

Pression d'essai

- Temperatura

Temperature

- 30 + 90 °C

Température

SCHEMA DI INSTALLAZIONE

INSTALLATION PLAN

PLAN D'INSTALLATION

