


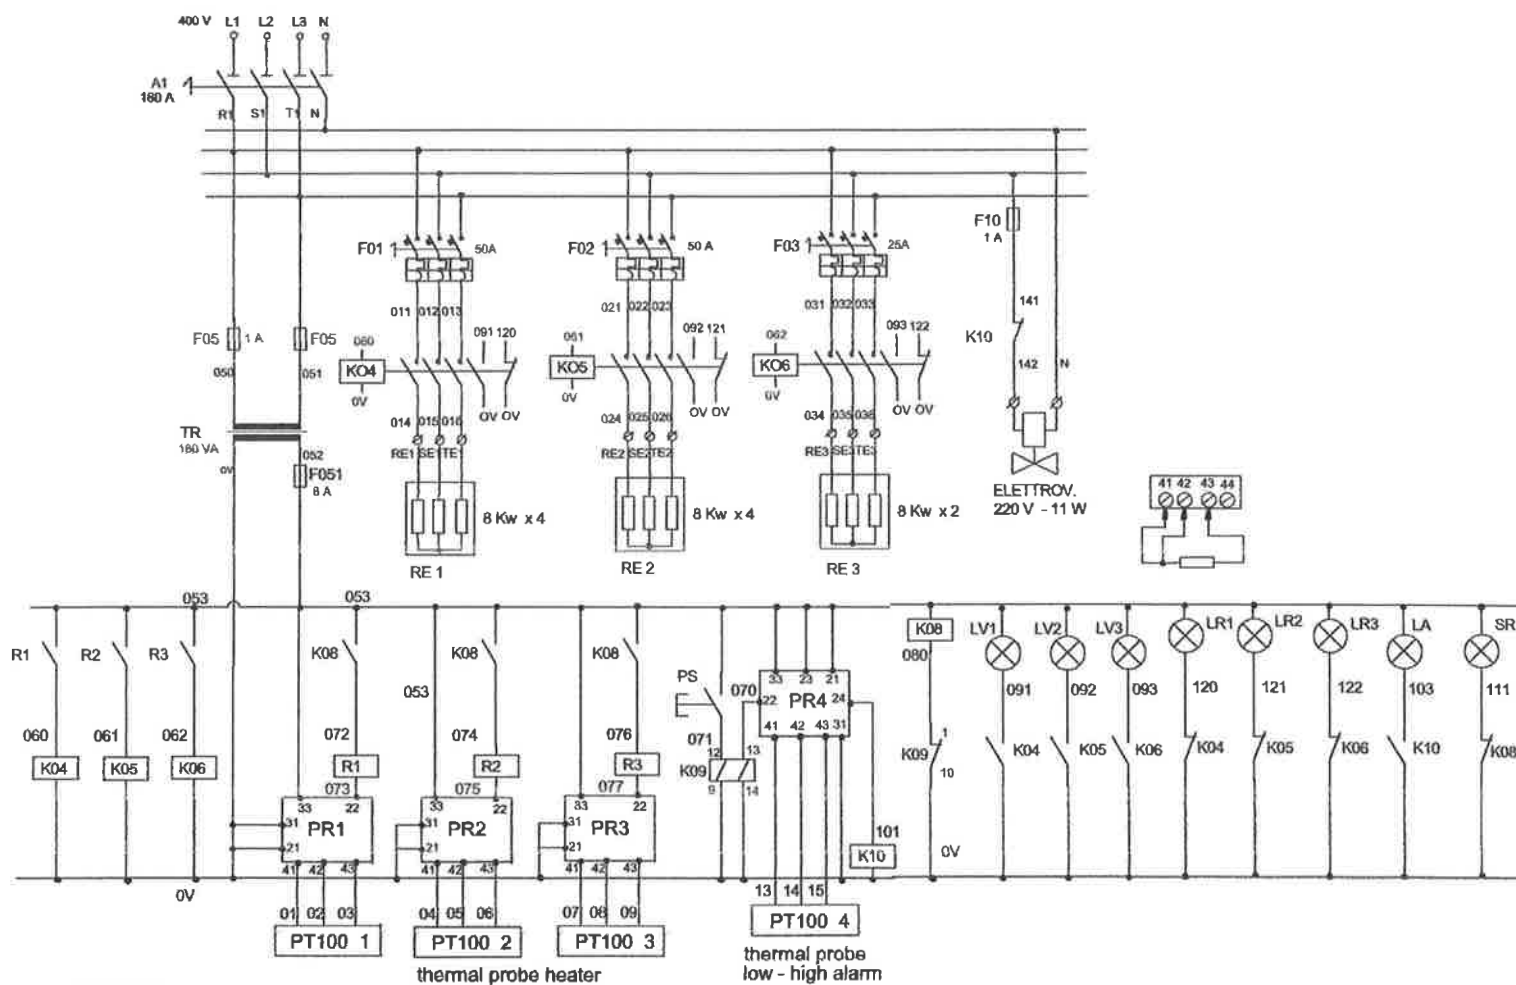

LEGENDA

A1	Interruttore Generale G.E. DILOS 2 - D/061 3 X 160A - 690V	Disconnector Loadbreak Main Switch G.E DILOS 2 -3 X 160A 690v
TR	Trasformatore di Sicurezza 160 VA 380 - 24 V	Safety Isolating Transformer 160 VA 380 -24 V
K04 - K05	Contattore LOVATO BF3800A024 56 A -	Contactor BF3800A024 56A 400V
K06	Contattore LC1 D18 B7 32 A -	Contactor LC1 D18 B7 32A
K08 - K10	Rele' FINDER 55.34 250 V - 5 A	Relay FINDER 55.34 250 V - 5A
K09	Rele' OMRON MY2K 250 V - 5 A + Reset	Relay OMRON MY2K 250 V - 5A+ Reset
RE1..RE8	Resistenze Elettriche Corazzate Ex d 8 KW - 400 V	Electric heating Ex d 8KW - 400V
LV1 - LV3	Lampada Spia Gruppo Resistenze 1-2-3 Inserito	Warning light Heating Group 1-2-3 on
LR1 - LR3	Lampada Spia Gruppo Resistenze 1-2-3 Disinserito	Warning light Heating Group 1-2-3 off
SR	Lampada Spia Allarme MAX Temperatura	Warning Light Alarm MAX Temperature
AL	Lampada Spia Allarme MIN Temperatura	Warning Light Alarm MIN Temperature
PS	Pulsante x Reset allarme MAX temperatura	Push Reset for Max alarm temperature
F01 - F02	Interruttore automatico ABB 203 C50 50A	Automatic miniature circuit breaker ABB 203 C50 50 A
F03	Interruttore automatico ABB 203 C25 25A	Automatic miniature circuit breaker ABB 203 C25 25 A
PR1	Termosta elettronico PR 4131- Lav1 (70 ° C)	Electronic Thermostat PR4131 -work1 (70 ° C)
PR2	Termosta elettronico PR 4131- La2 (72 ° C)	Electronic Thermostat PR4131 -work2 (72 ° C)
PR3	Termosta elettronico PR 4131- Lav3 (74 ° C)	Electronic Thermostat PR4131 -work3 (74 ° C)
PR4	Termosta elettronico PR 4131- reg. MIN e MAX temperatura 60 e 90 ° C	Electronic Thermostat PR4131 - Min and Max temperature regulation (60 and 90 ° degree)
F051	Portafusibili LEGRAND 37181 (5 X 20)	Switch Fuse Carrier LEGRAND 37181 (5 x 20)
F10	Portafusibile LEGRAND 05808 (10 x 38)	Switch Fuse Carrier LEGRAND 05808 (10 x 38)
F05	Portafusibile LEGRAND 05828 (10 x 38)	Switch Fuse Carrier LEGRAND 05828 (10 x 38)
R1-R2-R3	Interfacce modulari Finder EMR 38.51.7 24v ac - 6A	Modular Interface Finder EMR 51.38.7 24v ac - 6A

COPRIM

ALTAVILLA - VI -

0444-349091 fax 349084

QUADRO COMANDO VAPORIZZATORE ELETTRICO

Comand box for electric vaporizer EEx d - 500 Kg/h - 80 Kw -400 v

data 22/05/2015

schema

1.06.8100

rev.

diseg.

[Signature]